


AG213

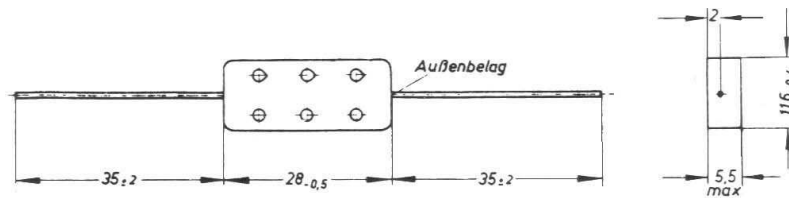

BMC mica capacitors of the type **AG213** are in accordance to the type CM25 of the American MIL-C-5A specification. They are ideally suited for the higher requirements of the commercial technology.

Capacitance range:	4,7 – 3500pF	
Capacitance tolerance:	> 4,7 – 100pF	± 2%, ± 5%, ± 10%
	> 100 – 1000pF	± 1%, ± 2%, ± 5%, ± 10%
Rated voltage:	500Vd.c./1000Vd.c. alternatively	
Temperature range:	-55°C to +100°C	
Lead style:	tinned copper wire 0,8 mm dia	

Marking of the outer coating:

The outer coating is respectively in the direction of the drop-tips on the backside of the capacitor. Color coding for military purposes.

Order information:

