


## RG512

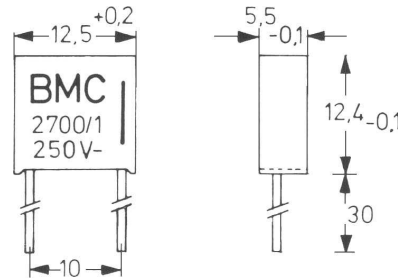

<b>High capacitance range:</b>	47 – 10000pF	Thickness: 5,5 mm
<b>Capacitance tolerance:</b>	± 0,25%, ± 0,5%, ± 1%, ± 2%, ± 5%, ± 10%	
<b>Rated voltage:</b>	250V d.c. - 10000pF 500V d.c. - 6000pF	
<b>Test frequency:</b>	≤ 1000pF 1MHz > 1000pF 1KHz	
<b>Test voltage V d.c.:</b>	according to MIL: 2 x working voltage according to DIN: 3 x working voltage	
<b>Lead spacing:</b>	A = 10 alternative B = 7,5	
<b>Lead style:</b>	copper steel wire, hot tinned 0,8mm dia.	

### Marking

The capacitors are marked with the capacitance value, tolerance, working voltage, outer coating and trade mark.

### Order information:

