
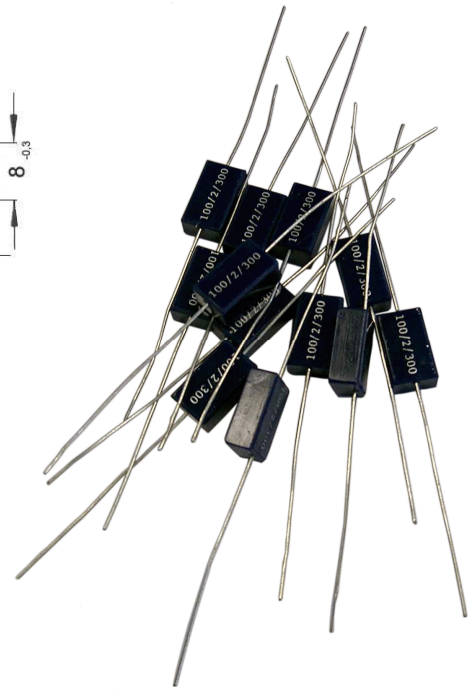


## AG211

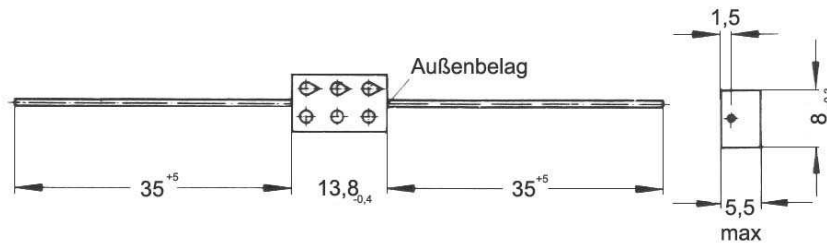

**BMC mica capacitors** of the type AG211 are in accordance to the type CM15 of the American MIL-C-5A specification. They are ideally suited for the higher requirements of the commercial technology.

**Capacitance range :** 10 – 1000pF

**Capacitance tolerance :**

> 10 - 20pF	± 1pF, ± 10%
> 20 - 50pF	± 1pF, ± 5%, ± 10%
> 50 - 100pF	± 1pF, ± 2%, ± 5%, ± 10%
> 100 - 510pF	± 0,5%, ± 1%, ± 2%, ± 5%, ± 10%

**Rated voltage :** 300V d.c. / 500V d.c. (alternatively)

**Temperature range:** -55°C bis +100°C

**Lead style:** verzinneter Kupferdraht 0,6 mm Ø

### Marking of the outer coating:

The outer coating is respectively in the direction of the drop-tips on the backside of the capacitor. Colour coding for military purposes.

### Order information:

