


CM554 (Baugröße 2220)

Kapazitätsbereich:	100V:	821 ... 2200 pF
	500V:	471 ... 1200 pF
	1000V:	50,5 ... 1500 pF
Kapazitätsschritte:	10 ... 100 pF	0,5 pF
	101 ... 1000 pF	1,0 pF
	ab 1010 pF	10,0 pF
Temperaturbereich:	-55°C bis +125°C	

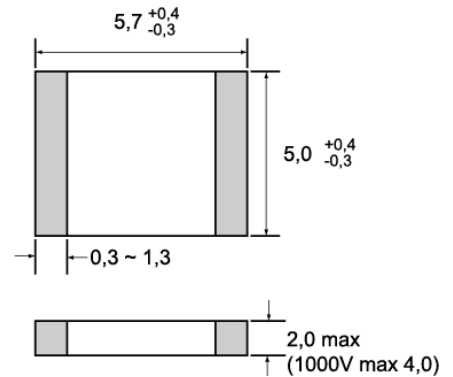

Kapazität (pF)	Toleranz				
	C	D	F	G	J
50,5 - 100,0	±0,25pF	±0,5%	±1,0%	±2,0%	±5,0%
101 - 2200			±1,0%	±2,0%	±5,0%

Temperaturkoeffizient: 0 - 50 ppm/°C

Isolationswiderstand: 10 x 10⁴ M Ohm min

Bestellinformation:

