
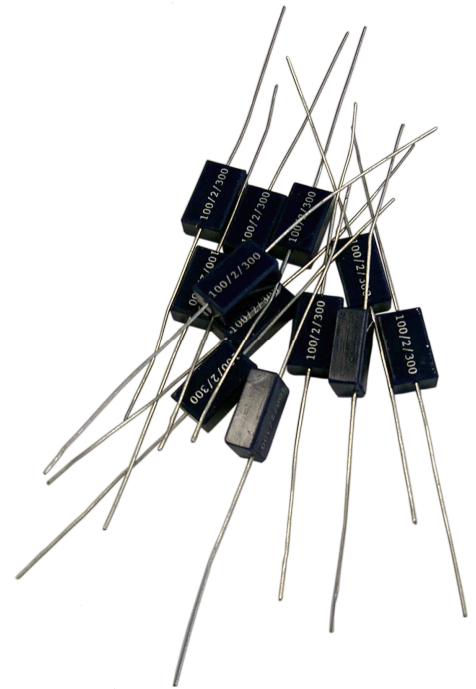


AG211

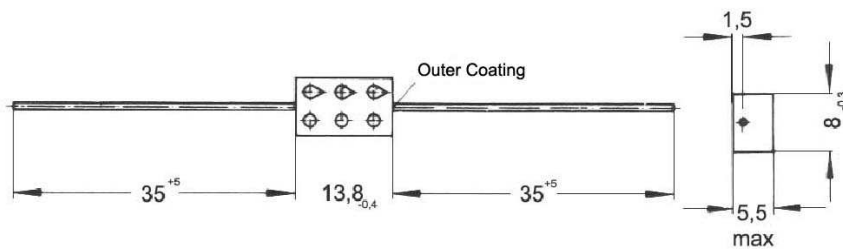

BMC mica capacitors of the type AG211 are in accordance to the type CM15 of the American MIL-C-5A specification. They are ideally suited for the higher requirements of the commercial technology.

Capacitance range :	10 – 1000pF								
Capacitance tolerance :	<table> <tr> <td>> 10 - 20pF</td> <td>± 1pF, ± 10%</td> </tr> <tr> <td>> 20 - 50pF</td> <td>± 1pF, ± 5%, ± 10%</td> </tr> <tr> <td>> 50 - 100pF</td> <td>± 1pF, ± 2%, ± 5%, ± 10%</td> </tr> <tr> <td>> 100 - 510pF</td> <td>± 0,5%, ± 1%, ± 2%, ± 5%, ± 10%</td> </tr> </table>	> 10 - 20pF	± 1pF, ± 10%	> 20 - 50pF	± 1pF, ± 5%, ± 10%	> 50 - 100pF	± 1pF, ± 2%, ± 5%, ± 10%	> 100 - 510pF	± 0,5%, ± 1%, ± 2%, ± 5%, ± 10%
> 10 - 20pF	± 1pF, ± 10%								
> 20 - 50pF	± 1pF, ± 5%, ± 10%								
> 50 - 100pF	± 1pF, ± 2%, ± 5%, ± 10%								
> 100 - 510pF	± 0,5%, ± 1%, ± 2%, ± 5%, ± 10%								
Rated voltage :	300V d.c. / 500V d.c. (alternatively)								
Temperature range:	-55°C bis +100°C								
Lead style:	verzinnter Kupferdraht 0,6 mm Ø								

Marking of the outer coating:

The outer coating is respectively in the direction of the drop-tips on the backside of the capacitor. Colour coding for military purposes.

Order information:

